

NELTEX GUARD 8055 DWV

DWV

8055

NELTEX



Totally Unmatched

PVC Sewer Force Mains



SWG500mm
ISO4435



PVC Soil Stack



NELTEX SEWERGURD with SEWERLOCK provides the optimum solution for soil stack. It is made from GUARD 8055 PVC compound assuring at least 50 years service life without any risk of corrosion. Machine installed fixed seal joints ensures that even your building moves the joint will stay in place unlike PVC cement jointed soil stack.



NELTEX SWG Thermofom

ISO4435


Is a superior alternative to the commonly used welded Large Diameter Tee's & Wye's. The joint section is formed by extracting a socket from the main pipe once the branch section is inserted in the main branch the thermoform fitting is completed. The result is a Large diameter fitting with stronger leak free joint.




(Welded Fittings)



Joint section is structurally stronger than the rest of the fitting due to over lapping design.

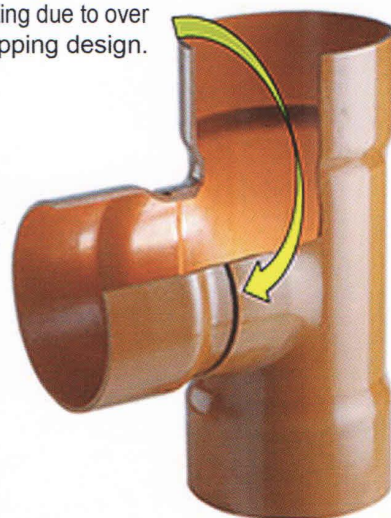


Compliance to Global Safety Standards

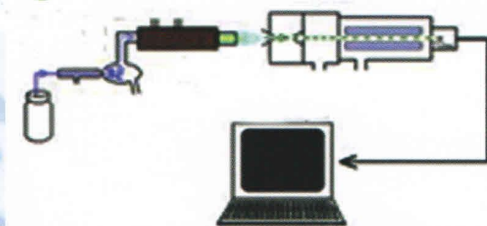

Compliance to Global Safety Standards

- By 2015, Europe and China will have remove Lead from the manufacture of PVC pipes.
- In 2014, with the advent of the new Neltex FCIE factory, NELTEX Pressureline Pipes will come to your projects Lead Free. This is possible through the usage of organic stabilizers instead of the industry standard which is: Lead.

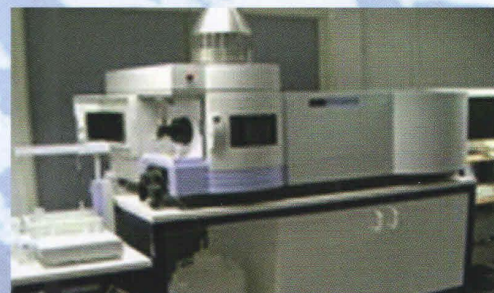

PROPOSED TECHNICAL SPECIFICATION FOR DWV PIPES

Sanitary Pipes to conform to ASTM D2729. PVC Pipe to meet 80 Joules Izod Impact and 55 Mpa Tensile Strength; 90% K65 resin by mass. Sanitary Fittings to conform to ASTM 3311. Sanitary Pipes and Fittings to be Lead Free as verified by ICP-OES test method.

Sewer Pipes to conform to ISO4435. PVC Pipe to be meet 80 Joules Izod Impact and 55 Mpa Tensile Strength; 90% K65 resin by mass. Sewer Pipes to have machine installed fixed seal with gaskets to be made of TPV or EPDM rubber homogenously bound to a stiff glass reinforced PP ring. Sewer Fittings to comply with ISO 4435. Sewer Pipes and Fittings to be Lead Free as verified by ICP-OES test method.

SANIGUARD 8055 MOULDED SANITARY FITTINGS

ELBOW		WYE & TEE		CLEAN OUT SET	
ND	DN	ND	DN	ND	DN
2" X 90°	57mm X 90°	2 X 2"	57mm X 57mm	2"	57mm
3" X 90°	82mm X 90°	3 X 3"	82mm X 82mm	3"	82mm
4" X 90°	107mm X 90°	3 X 2"	82mm X 57mm	4"	107mm
2" X 45°	57mm X 45°	4 X 4"	107mm X 107mm		
3" X 45°	82mm X 45°	4 X 3"	107mm X 82mm		
4" X 45°	107mm X 45°	4 X 2"	107mm X 57mm		

BUSHING REDUCER		COUPLING		P-TRAP	
ND	DN	ND	DN	ND	DN
4 X 3"	107mm X 82mm	2"	57mm	2"	57mm (with clean out set)
4 X 2"	107mm X 57mm	3"	82mm	3"	82mm
3 X 2"	82mm X 57mm	4"	107mm	4"	107mm

SEWERGUARD 8055 THERMOFORM FITTINGS

WYE & TEE	
ND	DN
20 X 12"	500 X 315 mm
20 X 10"	500 X 250 mm
20 X 8"	500 X 200 mm
20 X 6"	500 X 160 mm
20 X 4"	500 X 107 mm
20 X 2"	500 X 57mm
18 X 12"	450 X 315 mm
18 X 10"	450 X 250 mm
18 X 8"	450 X 200 mm
18 X 6"	450 X 160 mm
18 X 4"	450 X 107 mm
18 X 2"	450 X 52 mm
16 X 12"	400 X 315 mm
16 X 10"	400 X 250 mm
16 X 8"	400 X 200 mm
16 X 6"	400 X 160 mm
16 X 4"	400 X 107 mm
16 X 3"	400 X 82 mm
16 X 2"	400 X 57 mm
12 X 12"	315 X 315 mm
12 X 10"	315 X 250 mm
12 X 8"	315 X 200 mm
12 X 6"	315 X 160 mm
12 X 4"	315 X 107 mm
12 X 3"	315 X 82 mm
12 X 2"	315 X 57 mm
10 X 10"	250 X 250 mm
10 X 8"	250 X 200 mm
10 X 6"	250 X 160 mm
10 X 4"	250 X 107 mm
10 X 3"	250 X 82 mm
10 X 2"	250 X 57 mm

SEWERGUARD MOULDED DOUBLE WYE

ND	DN
6 X 4"	160mm X 107
6 X 6"	160mm X 160
8 X 6"	200mm X 160

SEWERGUARD MOULDED DOUBLE TEE

ND	DN
6 X 4"	160mm X 107
6 X 6"	160mm X 160
8 X 6"	200mm X 160
8 X 8"	200mm X 200

SEWERGUARD SINGLE HUB/ DOUBLE HUB

ND	DN
6 X 90°	160mm X 90
8 X 90°	200mm X 90
6 X 45°	160mm X 45
8 X 45°	200mm X 45

SEWERGUARD SADDLE TEE

ND	DN
8 X 6"	200 X 160
10 X 8"	250 X 160
12 X 6"	315 X 160
16 X 6"	400 X 160
18 X 8"	450 X 160
20 X 6"	500 X 160

SANIGUARD 8055 PIPES

SANIGUARD 8055 - SERIES 1000

DN	ND	Min. Thickness
2"	57mm	2.54
3"	82mm	3.70
4"	107mm	3.81

SANIGUARD 8055 - SERIES 600

DN	ND	Min. Thickness
2"	57mm	1.85
3"	82mm	2.54
4"	107mm	2.54

SEWERGUARD PIPES

SEWERGUARD 8055 - SDR 34

ND	DN	Min. Thickness
6"	160	4.6
8"	200	5.7
10"	250	7.1
12"	315	9.0
16"	400	11.70
18"	450	13.20
20"	500	14.60

SEWERGUARD 8055 - SDR 41

ND	DN	Min. Thickness
6"	160	4.00
8"	200	4.90
10"	250	6.20
12"	315	7.70
16"	400	9.80
18"	450	11.00
20"	500	12.30

SEWERGUARD 8055 - SDR 51

ND	DN	Min. Thickness
6"	160	3.20
8"	200	3.90
10"	250	4.90
12"	315	6.20

NELTEX DEVELOPMENT CO., INC.

26th floor, Unit A Washington Tower, Asiaworld City
E. Aguinaldo Blvd., Tambo, Parañaque City

Tel.: **879-7777** Fax: **(632) 879-3777**

www.neltex.com



Like us on
Facebook

www.facebook.com/neltexpipes